



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2569369 A1 1998/07/30

(21) **2 569 369**

(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(22) Date de dépôt/Filing Date: 1998/01/14

(41) Mise à la disp. pub./Open to Public Insp.: 1998/07/30

(62) Demande originale/Original Application: 2 277 096

(30) Priorités/Priorities: 1997/01/24 (GB9701447.6);
1997/06/18 (GB9712784.9)

(51) Cl.Int./Int.Cl. *B05C 11/10* (2006.01)

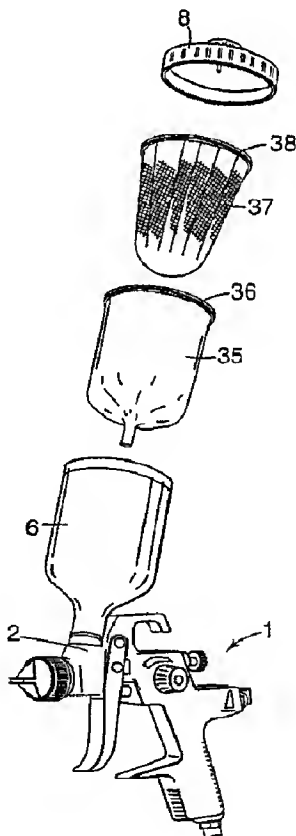
(71) Demandeur/Applicant:
MINNESOTA MINING AND MANUFACTURING
COMPANY, US

(72) Inventeurs/Inventors:
JOSEPH, STEPHEN C. P., US;
DOUGLAS, MALCOLM F., US;
BUTLER, ALAN F., US;
BASTOW, DAVID R., US;
SALHUS, JERRY E., US;
HARTFEL, MARGARET A., US

(74) Agent: SMART & BIGGAR

(54) Titre : APPAREIL DE PULVERISATION DE LIQUIDES ET RECIPIENTS ET GARNITURES JETABLES
UTILISABLES AVEC CELUI-CI

(54) Title: APPARATUS FOR SPRAYING LIQUIDS, AND DISPOSABLE CONTAINERS AND LINERS SUITABLE FOR
USE THEREWITH



(57) Abrégé/Abstract:

A spray gun (1) has a fluid reservoir (11) which contains a removable liner (13). The liner (13), which may be thermo/vacuum-formed from a plastics material, is a close fit within the interior of the reservoir and collapses as fluid is withdrawn from within the



(57) **Abrégé(suite)/Abstract(continued):**

liner during operation of the gun. Preferably, the liner has a comparatively-rigid base and is capable of standing, unsupported, outside the reservoir. The side walls of the liner are preferably thin in comparison to the base and can be collapsed for disposal of the liner. The reservoir (11) has a removable lid (15) and is capable of standing, inverted, on its own so that it can be filled with fluid. The lid (15) also functions to secure the liner (13) in the reservoir and, at the end of a spraying operation, the lid (15) and the liner (13) are removed together from the reservoir (11) and discarded, thereby simplifying the cleaning of the spray gun.

Abstract

A spray gun (1) has a fluid reservoir (11) which contains a removable liner (13). The liner (13), which may be thermo/vacuum-formed from a plastics material, is a close fit within the interior of the reservoir and collapses as fluid is withdrawn from within the liner during operation of the gun. Preferably, the liner has a comparatively-rigid base and is capable of standing, unsupported, outside the reservoir. The side walls of the liner are preferably thin in comparison to the base and can be collapsed for disposal of the liner. The reservoir (11) has a removable lid (15) and is capable of standing, inverted, on its own so that it can be filled with fluid. The lid (15) also functions to secure the liner (13) in the reservoir and, at the end of a spraying operation, the lid (15) and the liner (13) are removed together from the reservoir (11) and discarded, thereby simplifying the cleaning of the spray gun.

APPARATUS FOR SPRAYING LIQUIDS, AND DISPOSABLE CONTAINERS
AND LINERS SUITABLE FOR USE THEREWITH

5 The present invention relates to containers, more especially, disposable containers and to containers which can function as liners. The invention also relates to apparatus for spraying liquids (for example, spray guns) and, more especially, to the liquid containers or reservoirs of such apparatus.

10 There are many uses, in many different fields, for disposable containers. For example, many goods are packaged in disposable containers (e.g. bags) either before or after purchase. When the disposable container is a plastic bag, it will often be re-used by the purchaser as a disposable liner for another receptacle, for example a refuse bin. In some cases, disposable liners are produced specifically for
15 use in other, re-usable, receptacles: in those cases, the liner may be intended to aid disposal of the contents of the receptacle (as in the case of a liner in a refuse bin); to protect the receptacle or its contents; or to facilitate, or even eliminate, the cleaning of the receptacle.

20 The use of a liner in a receptacle in which a substance like glue, paint or plaster is mixed or contained for use can be particularly advantageous, in terms of facilitating the cleaning of the receptacle after use and of preventing substances in the receptacle from being contaminated by the remains of other substances.

Receptacles in which paints are mixed or contained for use, for example, must be
25 clean to ensure that the colour or quality of the paint is not altered by traces of other substances: that is particularly important, as explained above, when a vehicle is being re-painted and the paint is required to match an existing one. To avoid contamination problems when mixing paints, it is often the practice in vehicle body shops to use disposable waxed paper cups as mixing containers, particularly when
30 only a small amount of paint is required. An alternative approach, proposed in US-

WO 98/32539

PCT/US98/00796

A-4 383 635, involves the provision of a disposable container which, for use, is located in a re-usable frame-like receptacle.

5 In the field of spray guns, it has been proposed for various reasons that a disposable liner should be used in the reservoir of the gun (see US-A-3 211 324, 3 255 972, 4 151 929, 4 951 875 and 5 143 294, and EP-A-0 678 334). Guns for spraying liquids (e.g. paints, garden chemicals etc.) are generally well known and typically comprise a reservoir in which a liquid to be dispensed is contained, and a spray nozzle through which the liquid is dispensed, under pressure, under the control of a
10 trigger mechanism. The liquid may be fed from the reservoir under gravity and/or it may be entrained in a stream of pressurized fluid, for example air or water, which is supplied to the gun from an external source.

15 When a user wishes to change the liquid in the reservoir of a spray gun, it is usually necessary to clean the gun very thoroughly to ensure that no traces of the old liquid remain in the gun to contaminate the new liquid. That applies particularly to paint spray guns because any traces of an old batch of paint remaining in a gun may affect the colour of a new batch of paint to the extent that the new batch of paint becomes useless. This can cause problems especially in vehicle body shops where the paint
20 applied to a vehicle is often required to match existing paint work exactly. Alternatively, if paint residues have been allowed to dry within the gun, they may flake and contaminate the new batch of paint. The cleaning of spray guns is, however, a comparatively complex and time consuming operation. Moreover, in the case of paint spray guns, the cleaning operation involves the use of
25 comparatively large amounts of solvents which, for environmental reasons, should be handled and disposed of with care. That, in turn, can add substantially to the cost of a painting operation. It has already been suggested (see, for example, EP-A-0 678 334 mentioned above) that the use of a disposable liner in the paint reservoir (i.e. the paint pot) of a spray gun can simplify the cleaning of the gun and
30 reduce the amount of solvent required.

6057-6121(S)

The present invention is concerned with the provision of a container which is sufficiently inexpensive to be disposable and which can preferably be collapsed when it is to be disposed of but which, nevertheless, is
5 comparatively easy to handle and to fill when in use. The invention is concerned, more especially, with the provision of such a container which is suitable for use as a liner in another receptacle. The present invention is also concerned with enabling the cleaning of spray guns and like apparatus
10 to be simplified, and with thereby enabling the time and expense associated with that operation to be reduced.

The present invention provides a container comprising side walls and a comparatively-rigid base thermo/vacuum-formed from a plastics material; wherein the
15 side walls are thin in comparison to the base and are collapsible, but the container is capable of standing, unsupported, on the base with the side walls extended and upright.

More especially, the present invention provides a
20 container comprising a base, and side walls extending from the base; wherein the base and side walls are thermo/vacuum formed together from a plastics material in such a manner that the base is comparatively rigid and the side walls are thin in comparison to the base and are collapsible but the
25 container is capable of standing unsupported, on the base with the side walls extended and upright.

A container in accordance with the invention may be used as a liner for a receptacle, the liner having a shape which corresponds to the interior of the receptacle.
30 As a modification, the invention also provides, in combination with a receptacle, a disposable liner which fits within and has a shape corresponding to the interior of the

60-57-6121(S)

receptacle wherein the liner is thermo/vacuum formed from a plastics material. The liner is preferably, but not necessarily, collapsible.

In another aspect of the present invention, there
5 is provided a spray gun comprising: a fluid reservoir; a removable, collapsible, liner having a base and at least one side wall, wherein the liner has a shape corresponding to, and is a close fit within, the interior of the reservoir, and wherein the liner in its non-collapsed state is free of
10 pleats, corrugations, seams, joints or gussets, and also free of a groove at the internal junction of the side wall with the base; a removable lid secured by push-fit connection to an opening in the reservoir, the lid containing a fluid outlet; a removable collar located over
15 the lid, attaching the lid to the reservoir; and a spray gun body including a spray nozzle for dispensing fluid from within the liner, wherein the combination of reservoir and liner has a fill opening which is inverted when connected to the spray gun body in normal operation, with fluid passing
20 from within the liner to the spray gun body.

The present invention also provides a spray gun comprising a fluid reservoir; a removable, collapsible, liner which has a shape corresponding to, and is a close fit

60557-6121 (S)

within, the interior of the reservoir; wherein the liner is capable of standing unsupported by the reservoir; and a spray nozzle for dispensing fluid from within the liner; wherein the liner collapses when fluid is withdrawn from within the liner during operation of the gun.

5 Also in accordance with the invention, there is provided a spray gun comprising a fluid reservoir having a removable lid located in an opening in the reservoir; a removable liner located within the reservoir and secured to the reservoir, by the lid, at the periphery of the opening; and a spray nozzle for dispensing fluid from within the liner; wherein the liner is removable from the reservoir together with the lid.

10

The present invention also provides a gravity-fed spray gun comprising a fluid reservoir having a removable lid located in an opening in the reservoir; and a spray nozzle for dispensing fluid drawn from within the reservoir through an outlet in the lid; wherein the reservoir is removable from the gun and is capable of standing on its own to enable fluid to be loaded into the reservoir through the opening.

15

The invention further provides a spray gun comprising a fluid reservoir; and a spray nozzle for dispensing fluid from within the reservoir; the reservoir comprising a self-supporting container which is removable from the gun and is collapsible for disposal.

20

In accordance with another aspect of the invention, there is provided a fluid reservoir for attachment to a spray gun, the reservoir having a removable lid which is located in an opening in the reservoir and in which is formed a fluid outlet for the reservoir; the reservoir including a removable, collapsible, liner which has a shape corresponding to, and is a close fit within, the reservoir; wherein the liner is secured to the reservoir by the lid at the periphery of the opening and is removable from the reservoir together with the lid. The invention also provides a fluid reservoir for attachment to a spray gun, the reservoir having a removable lid which is located in an opening in the reservoir and in which is formed a fluid outlet for the reservoir,

25

30

60557-6121D

the fluid outlet being shaped for attachment to the spray gun; and a closable air vent in the end of the reservoir remote from the lid.

In accordance with yet another aspect of the invention, there is provided a liner for use in the reservoir of a spray gun, the liner being formed from a plastic material and being a close fit within the reservoir; the liner having a comparatively rigid base, and side walls which are thin in comparison to the base and are collapsible.

The present invention also provides a spray gun comprising a fluid reservoir, and a spray nozzle for dispensing fluid from within the reservoir, the reservoir having a removable lid and including a removable, generally conical, mesh filter secured in the reservoir by the lid.

The present invention also provides a gravity-feed spray gun comprising a fluid reservoir, and a spray nozzle for dispersing fluid from within the reservoir, the reservoir having a removable lid and a removable liner secured in the reservoir by the lid.

In another aspect of the invention, there is provided a gravity-fed spray gun comprising a fluid reservoir having a removable lid located in an opening in the reservoir; and a spray nozzle for dispensing fluid drawn from within the reservoir through an outlet in the lid; wherein the reservoir is removable from the gun, is capable of standing on its own to enable fluid to be loaded into the reservoir through the opening, and is collapsible for disposal.

In a further aspect of the invention, there is provided for use in a spray gun, a container for attachment

60557-6121D

to the spray gun to form, without the presence of any other receptacle, a fluid reservoir for the gun; the container being a sealed container and having fluid therein.

In a still further aspect of the invention, there
5 is provided a liner for use in the reservoir of a spray gun, the liner being thermo/vacuum-formed from a thermoplastic material and being a close fit within the reservoir; the liner having a comparatively rigid base, side walls which are thin in comparison to the base and are collapsible, and
10 a flat outwardly-extending rim portion which is shaped to sit on the edge of an opening in the spray gun reservoir.

The term "thermo/vacuum-forming" as used herein means a process by which a sheet of material is heated to a softened condition and formed into a required shape, defined
15 by a mould, while in that softened condition. It includes the case in which the application of a differential air pressure is used to assist in forming the material into the required shape and, in particular, includes the case in which a vacuum is produced on one side of the material to
20 assist in forming it into the required shape (also known simply as "vacuum-forming").

The term "collapsible" as used herein with reference to the side walls of a container/liner in accordance with the invention indicates that the side walls
25 can be distorted so that, by the application of moderate pressure (e.g. hand pressure), the rim of the container can be pushed towards the base of the container, without the side walls being ruptured.

WO 98/32539

PCT/US98/00796

The term "paint" is used herein to include all forms of paint-like coating materials that can be applied to a surface using a spray gun, whether or not they are intended to colour the surface. The term includes, for example, primers, base coats, lacquers and similar materials.

By way of example only, embodiments of the invention will be described with reference to the accompanying drawings, in which:

Fig. 1 is a perspective view of a prior art spray gun, shown partly-disassembled so that it can be filled with paint;

Fig. 2 shows the components of an alternative form of paint reservoir for the gun of Fig. 1, in an exploded condition;

Fig. 3 shows the paint reservoir of Fig. 2 in an assembled condition, with an adapter for connecting the reservoir to a spray gun;

Fig. 4 shows a longitudinal cross-section through the paint reservoir and the adapter of Fig. 3;

Fig. 5 shows the paint reservoir of Fig. 4 being attached to a spray gun;

Fig. 6 shows the paint reservoir of Fig. 4 in use on a spray gun;

Fig. 7 shows components of the paint reservoir of Fig. 4 being removed after use;

Fig. 8 is similar to Fig. 2 but shows a modified form of paint reservoir;

Fig. 9 shows a longitudinal cross-section through an alternative form of lid for the paint reservoirs of Figs. 2 to 4 and 8;

Fig. 10 is similar to Fig. 2 but shows another modified form of paint reservoir;

Fig. 11 shows part of a longitudinal cross-section through the paint reservoir of Fig. 10;

Fig. 12 shows a spray gun similar to that of Fig. 1 but with an alternative form of paint reservoir;

Fig. 13 shows the gun of Fig. 12 with a modified form of paint reservoir;

Fig. 14 illustrates a modification to the reservoir of the gun of Fig. 13.

Fig. 15 is a view, similar to Fig. 3, of an alternative form of paint reservoir;

Figs. 16 and 17 show modified forms of a component of Fig. 15;

WO 98/32539

PCT/US98/00796

Fig. 18 illustrates the use of a holder for the paint reservoir of Fig. 15;
Fig. 19 is a perspective view of a liner/container in accordance with the invention;
Fig. 20 is a similar view but showing the liner/container in the process of being
collapsed for disposal;

5 Fig. 21 (a) to (c) is a diagrammatic illustration of a method for producing a liner for
the paint reservoirs of Figs. 2 to 4, and 10;
Fig. 22 illustrates a modification of the method of Fig. 21;
Fig. 23 shows a paint-mixing pitcher; and
Fig. 24 shows a liner in accordance with the invention, for use with the pitcher of
10 Fig. 23.

Fig. 1 of the drawings illustrates a typical prior art paint spray gun 1 of the gravity-
feed type. The gun 1 comprises a body 2, a handle 3 which extends downwards
from the rear end of the body, and a spray nozzle 4 at the front end of the body.
15 The gun is manually-operated by a trigger 5 which is pivotally-mounted on the sides
of the gun. The paint reservoir, or paint pot, 6 which contains paint (or similar
material) to be discharged by the gun, is located on the top of the body 2 and
communicates with an internal passageway (not visible) for compressed air, which
extends through the gun from a connector 7 at the lower end of the handle 3 to the
20 nozzle 4. In use, the connector 7 is connected to a source of compressed air (not
shown) so that, when the user pulls on the trigger 5, compressed air is delivered
through the gun to the nozzle 4 and entrains and atomizes paint which is being
delivered under gravity from the pot 6. The paint is then discharged through the
nozzle 4 with the compressed air, as a spray.

25 The paint which is contained in the pot 6 is often mixed by hand (for which a
separate receptacle, for example a jug, is required), and poured into the pot. To
ensure that there are no unwanted particles in the paint, which would spoil the finish
of the painted surface, the paint is usually poured into the pot 6 through a filter.
30 Fig. 1 shows the cap 8 of the pot 6 removed for this purpose, and a conical filter 9
about to be positioned on the open end of the pot. The filter 9 is shown as being a

WO 98/32539

PCT/US98/00796

known type of disposable conical filter, having solid sides and a filter mesh portion 10 at the pointed end of the cone. When the pot 6 has been filled with paint, the filter 9 is removed and discarded, and the cap 8 of the pot is replaced. If the filter 9 is a reusable filter then, like the gun, it should be cleaned thoroughly before it is used with a different liquid (e.g. a paint of a different colour or a liquid having a different chemical composition).

Fig. 2 illustrates the components of an alternative form of paint pot 11 which can be used on the gun 1 of Fig. 1 (or any similar gun) instead of the pot 6. The alternative form of paint pot 11 is shown assembled in Fig. 3 and (in cross-section) in Fig. 4.

The paint pot 11 comprises an open container 12, comparable in size to a conventional paint pot of a hand-held spray gun, having an air hole 12A in its base and provided with a disposable liner 13. The liner 13 corresponds in shape to (and is a close fit in) the interior of the container 12 and has a narrow rim 14 at the open end which sits on the top edge of the container. The container 12 also has a disposable lid 15 which is a push-fit in the open end of the liner 13. The lid 15 has a central aperture 16 (Fig. 4) from which extends a connector tube 17 provided, at its end, with outward extensions 18 forming one part of a bayonet connection. The aperture 16 is covered by a filter mesh 19 which may be a push fit into the aperture or may be an integral part of the lid 15. The lid 15 is held firmly in place on the container 12 by an annular collar 20 which screws onto the container, on top of the lid.

The paint pot 11 is attached to the spray gun 1 through the use of an adapter 21 shown, separated from the paint pot, in Fig. 3 and (in cross-section) in Fig. 4. The adapter 21 is a tubular component which, at one end 22, is formed internally with the other part of the bayonet connection for attachment to the connector tube 17 of the paint pot 11. At the other end 23, the adapter is shaped to match the standard attachment of the spray gun paint pot (typically a screw thread).

WO 98/32539

PCT/US98/00796

The liner 13 of the paint pot 11, as already mentioned, corresponds in shape to the interior of the container 12 and has a narrow rim 14 at the open end which sits on the top edge of the container. As described below, the liner is self-supporting but is also collapsible and, preferably, has a comparatively rigid base 13A and comparatively thin side walls 13B so that, when it collapses, it is in the longitudinal direction by virtue of the side walls collapsing rather than the base. In addition, the liner 13 has no pleats, corrugations, seams, joints or gussets, and also no groove at the internal junction of the side walls 13B with the base 13A. A liner of that type will be described in greater detail later with reference to Figs. 19 and 20. Also described below is a thermo-forming process by which such a liner can be produced.

The container 12 of the paint pot 11 is formed from a plastic material, for example polyethylene or polypropylene, and may be translucent (as shown in Fig. 2) or opaque, and of any suitable size. For use with a paint spray gun, containers having a capacity of 250, 500 or 800 ml could typically be used, although other sizes could be used if required. The lid 15 is also formed from a plastic material, for example, polyethylene or polypropylene, and may be formed by an injection moulding process. The lid may be translucent or opaque and may be coloured. The collar 20 may be a moulded plastic component, or it may be a machined metal (for example, aluminium) component. The adapter 21 may be a machined metal component and may, for example, be formed from aluminium and anodised.

To use the paint pot 11, the adapter 21 is attached (at the end 23) to the spray gun and is left in position. Then, with the paint pot 11 disassembled as shown in Fig. 2, the liner 13 is pushed inside the container 12. Paint is then put into the container, the lid 15 is pushed into place and the collar 20 is screwed down tightly to hold the lid in position. The top portion of the liner 13 is then trapped between the lid 15 and the container 12, and the liner rim 14 is trapped between the top edge of the container and the collar 20, as shown in Fig. 4. Advantageously, the lid 15 is formed with barbs (not visible) on its surface to engage and hold the top of the

WO 98/32539

PCT/US98/00796

liner. The spray gun 1 is then inverted from its normal operating position so that the end of the connector tube 17 can be attached to the adapter 21 as illustrated in Fig. 5, after which the gun can be returned to its normal position (illustrated in Fig. 6) and is ready for use in the usual way. As paint is removed from within the liner 13, the sides of the liner collapse as a result of the decreased pressure within the liner. The base of the liner, being more rigid, retains its shape so that the liner tends to collapse in the longitudinal rather than the transverse direction thereby reducing the possibility of pockets of paint being trapped in the liner.

10 The user can choose to evacuate the air from within the liner 13 before operating the spray gun 1 although that is not essential. It does, however, increase the range of angles at which the gun will function satisfactorily since there is no risk of air entering the gun from the paint pot 11. To evacuate the air from within the liner 13, the trigger 5 of the gun should be actuated while the gun is still in the position shown in Fig. 5.

After use, when the gun is to be cleaned, the gun can be re-inverted and the trigger 5 can be actuated briefly to allow paint within the gun to drain back into the liner in the pot 11. The pot 11 is then removed from the gun by detaching the connector tube 17 from the adapter 21 (which remains on the gun). The collar 20 is removed from the container 12, and the lid 15 is then pulled out, bringing with it the collapsed liner 13, as shown in Fig. 7. The lid (including the filter 19) and liner are discarded, leaving the container 12 and collar 20 clean and ready for re-use with a fresh liner and lid. Only the gun itself needs to be cleaned, resulting in a substantial reduction in the amount of solvent used. The risk of unused paint spilling from the pot 11 is also substantially reduced because the liner 13 is removed and discarded with the lid 15 in place. Moreover, because the liner is discarded in a collapsed condition, the amount of space required for collection of used liners is minimized.

30 Because the liner 13, as described above, is an accurate fit inside the container 12 and has a smooth internal surface, it is possible to mix paint in the container 12 itself

WO 98/32539

PCT/US98/00796

rather than in a separate receptacle. In that way, cleaning of a separate mixing receptacle can be eliminated to achieve a further reduction in the amount of solvent used. That possibility does not exist when using a gravity-feed gun with a conventional paint pot, as shown at 6 in Fig. 1, because the latter is open at both ends. The possibility of the liner 13 being punctured or damaged by the mixing implement is minimized, first because the liner fits inside the container 12 exactly and, second, because the self-supporting nature of the liner (described below) means that it is less likely to be dragged around inside the container during the mixing process. To facilitate the use of the container 12 as a mixing receptacle, the side walls of the container may be provided with markings 25 (Figs. 2 and 3) enabling the volume of the contents of the container to be determined. The general shape of the container 12 and, in particular, the fact that it is flat-bottomed and stable when in the orientation shown in Fig. 2 makes it particularly suitable for use as a mixing receptacle, as does the fact that it is translucent as already described. If, however, the container 12 is opaque, it could be formed with slots in the side walls, through which the liner 13 could be viewed to enable the user of the spray gun to assess the amount of paint in the pot 11 at any time.

When paint is mixed in the container 12, the inclusion of the filter mesh 19 in the container lid 15 prevents unwanted particles in the paint from entering the spray gun. The mesh 19 can be omitted, however, if the paint is textured, or if it is mixed in a separate receptacle and strained when it is transferred to the lined container 12 or if the presence of contaminants in the paint is unimportant.

Although the collar 20 of the paint pot 11 is described above as being a separate item, it could be combined with the lid 15, in which case it would also be disposable. As a further alternative, the lid 15 (with the connector tube 17 and the mesh 19) could be formed as an integral part of the liner 13, to which it could be connected by a hinge joint 26 as illustrated in Fig. 8. In that case, there is no need for the lid to fit inside the mouth of the liner to ensure that the lid and liner will be removed together from the container after use; however, that would still be

WO 98/32539

PCT/US98/00796

necessary if the lid were required to remain in place in the liner after use. As yet another alternative, the collar 20 could be replaced by a band secured around the top of the pot 11 to hold the lid 15 and liner 13 in place. The band could be secured to the pot 11 and could, for example, be formed from rubber or be part of a metal clip arrangement of the type used to secure the tops of jars and bottles.

If a more positive engagement is required between the lid 15 of Figs. 2 to 4 and the liner 13, the lid could be a snap fit with the liner instead of a push-fit as shown. The liner could, for example, be formed with an internal circumferential rib positioned to engage in a corresponding groove on the adjacent surface of the lid.

As yet a further alternative, the push-in lid 15 could be replaced by a lid 27 having the form shown in Fig. 9. The lid 27 is also a push-fit inside the liner but is generally conical in shape and at its upper end 28, corresponds in shape to the end of the connector tube 17 of Figs. 2 to 4 so that it will engage in the same adapter 21. The lid 27 has an outwardly-extending rim 29 which will sit on top of the liner rim 14, and a shaped portion 29A which will engage the internal surface of the liner. The form of the shaped portion 29A allows the lid 27 to be pushed into the mouth of the liner and also provides a recess 29B into which the edge of the liner can the contract so that the lid is securely located. The form of the shaped portion illustrated in Fig. 9 is not essential, however, and alternatives could be used including, for example, barbs as described above with reference to the lid 15 of Fig. 4. The lid 27 is held in place on the container by a screw-on collar, similar to the collar 20, which will sit on top of the rim 29 of the lid. The lid 27 may incorporate a filter similar to the filter 19 of Figs. 2 to 5. Alternatively, in each case, the filter may be generally cylindrical in shape so that it can be inserted into the tubular part of the lid from the end adjacent the bayonet connection. In that case, the internal shaping of the tubular part of the lid should ensure that the filter remains in position when the spray gun is in use.

WO 98/32539

PCT/US98/00796

The components of an alternative form of paint pot 30 are illustrated in Fig. 10. The pot 30, like the pot 11 of Fig. 2, comprises a container 12 and a liner 13. In this case, however, the filter 19 of the pot 11 is formed as a separate item 31 having a diameter corresponding to that of the container 12 and including a circumferential sealing gasket 32. In addition, the lid 15 and collar 20 of the pot of Fig. 2 are replaced by a generally-conical lid 33 which is a screw-fit onto the container and which, at its upper end has a tubular extension 34 of similar shape to the connector tube 17 of Fig. 3 so that it will engage in the same adapter 21. The pot 30 is assembled by pushing the liner 13 inside the container 12 and then, after paint has been put into the container, placing the filter 31 on top of the container and securing it in position by screwing down the lid 33. The rim 14 of the liner 13 and the sealing gasket 32 of the filter 31 are then both trapped between the lid 33 and the container 12, as illustrated in Fig. 11, thereby preventing the leakage of paint from the pot 30 at this location when the pot has been secured to a spray gun and is inverted for use.

The adapter 21 could be dispensed with by forming the ends of the tubular parts 17, 34 of lids of the containers 11, 30 with screw threads so that they can engage directly in the standard paint pot attachment on the spray gun 1.

Fig. 12 illustrates an alternative spray gun in which the standard paint pot 6 of the spray gun 1 (see Fig. 1) is retained and is provided with a liner 35 which fits inside the pot and, preferably, extends into the connection with the body 2 of the gun to form a liquid-tight seal with the latter, for example through the use of a flexible O-ring (not visible) between the gun and the liner. In this case, the liner 35 does not collapse when paint is removed from within the pot and may be formed from a more rigid material to assist in positioning it within the pot 6. Once in position, the liner 35 is held in place by the cap 8 which is screwed down onto an outwardly-extending rim 36 at the open end of the liner. The pot 6 of Fig. 12 is additionally provided with a filter 37 which is of generally conical shape and formed entirely of mesh material and which, in use, is positioned inside the liner 35. The filter 37, like the

WO 98/32539

PCT/US98/00796

liner 35, has an outwardly-extending rim 38 which lies on top of the liner rim 36 and is likewise held in place by the cap 8 of the pot 6.

5 The pot 6 of Fig. 12, unlike the pot 11 of Fig. 3 is intended to be filled with paint while attached to the spray gun 1. The liner 35 and filter 37 are placed in position, paint is poured into the pot, and the cap is fitted. During this operation, there is no risk of the filter being dislodged and, because the filter is formed entirely of mesh material, the user is always able to see the paint level while the paint is being poured into the pot. The gun 1 is then ready for use. All of the paint dispensed by the gun
10 passes through the filter 37 and there is, accordingly, no need for the paint to be filtered when it is being poured into the pot 6. After use, the cap 8 unscrewed is to allow the filter 37 and liner 35 to be removed. The liner 35 is discarded and the filter 37 is either also discarded or is cleaned, depending on whether or not it is disposable. The use of the liner 35 again reduces the amount of solvent required to
15 clean the gun 1, with a further reduction being possible through the use of a disposable filter 37.

20 The filter 37 can have any suitable shape and may, for example, have fluted sides to increase the effective surface area of the filter.

In a modified arrangement, illustrated in Fig. 13, the liner 35 and the filter 37 are combined to form a single unit 39. In this case, the filter is discarded with the liner.

25 In each of the arrangements shown in Figs. 12 and 13, the liner 35 and filter 37 can be removed from the pot 6 with the lid 8. In that case, it is possible to replace the conventional lid 8 of the pot 6 by a disposable lid so that the lid 8, liner 35 and filter 37 can be discarded together.

30 The disposable unit 39 of Fig. 13 could be modified so that it would replace the paint pot 6 of the spray gun 1 instead of being fitted inside the paint pot. In that case, the unit 39 could be supplied as a sealed cartridge 50 already filled with paint

WO 98/32539

PCT/US98/00796

as illustrated in Fig. 14. Externally, the cartridge 50 is similar to the paint pot 6 and can be connected to the gun 1 in the same way. Because it is sealed, however, the outlet end 51 of the cartridge must be pierced and an air vent provided, for example at the other end 52 of the cartridge, to allow paint to flow into the gun. The outlet

5 end 51 of the cartridge 50 could, for example, be pierced by the user before the cartridge (with the outlet end uppermost) is attached to the (inverted) gun. Alternatively, the gun 1 could be modified so that the outlet end 51 is pierced automatically when the cartridge 50 is attached to the gun. An air vent at the other end 52 of the cartridge 50 could then be formed after the cartridge has been

10 attached to the gun by piercing that end of the cartridge either manually or, for example, by attaching a separate cap 53 which is designed to pierce the cartridge when it is placed in position. Alternatively, an air vent, which simply needs to be opened when the gun is ready for use, could be pre-formed in the cartridge.

15 After use, the cartridge 50 is removed from the gun and discarded. Because the cartridge 50 contains a filter, there is no need for the supplier to filter the paint before it is loaded into the cartridge. If, however, the paint is pre-filtered, then the filter in the cartridge 50 can be omitted.

20 Fig. 15 illustrates an alternative form of paint pot 40 for a spray gun 1, which is entirely disposable. The paint pot 40 is generally similar to the pot 30 shown in Fig. 10 except that the container 12 is replaced by a disposable container 41, described below, and the liner 13 is omitted.

25 The container 41 of Fig. 15 can be any conventional disposable container suitable for containing paint and for attachment to the paint pot lid 42. The container 41 may, for example, be formed from a thin plastic material, preferably translucent (as shown) so that the contents of the container are visible and preferably having markings 43 on the side walls to enable the volume of the contents of the container

30 to be determined. An air hole 44 is formed in the base of the container, together with some means for closing the air hole when desired. That means may take the

WO 98/32539

PCT/US98/00796

form of a strip of adhesive tape (not shown) which is peeled back to open the hole 44 and can be re-adhered to close the hole when required. Alternatively, a flip-top closure or some simple hand-operated valve mechanism may be provided. The container 41 has an external screw-thread at its open end, for attachment of the lid 42 which is generally similar to the lid 33 of Fig. 10 and is likewise shaped, at its upper end 42A, for attachment to a spray gun (if necessary by means of a suitable adapter). The lid 42 may be formed from the same material as the container 41 and, as shown, may also be translucent. A flat filter mesh 45, which is also disposable, extends across the mouth of the container 41. The mesh 45 may be a separate item, held at its periphery between the lid 42 and the container 41, or it may be formed integrally with the lid.

To use the pot 40, the lid 42 and filter mesh 45 are removed from the container 41 which is then filled with paint (care being taken that the air hole 44 in the base of the container is closed). It is unnecessary to strain the paint when it is put into the container 41 and, as described above, it is possible to mix the paint in the container thereby avoiding the need for a separate receptacle for that purpose. The lid 42 and mesh 45 are then put back in position on the container 41, the lid 42 is attached to the (inverted) spray gun 1 which is then returned to its normal position, and the air hole 44 in the base of the container is opened. The spray gun 1 can now be used in the usual way. On completion of the spraying operation, the air hole 44 is closed-off again, the pot 40 is detached from the gun 1 and may then be discarded leaving only the gun to be cleaned. Before the pot 40 is detached, the spray gun 1 can be re-inverted and the trigger 5 of the gun operated to allow excess paint remaining in the gun to drain back into the pot. In either case, if sufficient paint remains in the pot 40, the pot could be re-sealed (instead of being discarded) and used again.

Advantageously, the container 41 of the pot is formed so that it can be collapsed after use. In some cases, it may be possible for the lid 42 also to be collapsible.

30

WO 98/32539

PCT/US98/00796

As an alternative, the lid 42 could be a reusable component and would be cleaned with the gun. With an arrangement of that type, it is possible for the disposable container 41 to be supplied as a cartridge already filled with paint and sealed by a cover which would simply be removed before the container is attached to the lid 42.

5 The filter mesh 45 could be either a disposable or a reusable component. As a further alternative, the container 41 and lid 42 together could be supplied as a cartridge sealed by a removable cover, at the upper end 42A of the lid, which would be removed before the cartridge is attached to the gun. In that form, the cartridge is similar to the cartridge 50 of Fig. 14.

10

Through an appropriate selection of the dimensions of the lid 42 of the paint pot 40, it is possible for the one lid 42 to be used with containers 41 of different sizes. The user would then select, in each case, the container 41 that contains the most suitable amount of paint. It may also be desirable for a range of filters 45 having different mesh sizes to be provided so that the user can select the mesh size that is best suited to the type of paint that is being used. It is not essential for the filter mesh 45 to have the form and/or location shown in Fig. 15: it could, for example, have a conical form as shown in Fig. 16 and/or it could be located in the outlet of the lid 42, as shown in Fig. 17. Alternatively, the filter 45 can be omitted if the paint is filtered before it is put into the container 41, or if the presence of contaminants in the paint is unimportant.

15

20

25

The lid 42 need not have the exact shape shown in Fig. 15 and could, for example, be replaced by a push-in lid in combination with a screw-on collar as shown in Fig. 2.

30

When the container 41 (with or without the lid 42) is supplied as a cartridge containing paint (or other coating material) it may be desirable in some cases for the paint/coating material to be contained within a sealed collapsible liner within the cartridge. That may, for example, be desirable if it is necessary for the paint/coating material to be kept isolated, for example from the air or from light, until it has been

WO 98/32539

PCT/US98/00796

sprayed onto the surface to be coated. The air hole 44 in the container 41 can then remain open all the time, or may be omitted if the container 41 itself is not airtight.

Depending on the shape of the container 41, it may be desirable to provide a holder in which the container can be located to ensure that it will not be knocked over.

One suitable holder 50, shown in Fig. 18, comprises container portion 51 which is of similar shape to, but slightly larger than, the container 41 and is provided with an enlarged base 52. The container 41 is placed in the container portion 51 to ensure that it remains upright while it is being filled and/or attached to the spray gun 1.

Although the above description refers to a paint spray gun, it should be understood that it applies also to other types of spray gun including, for example, guns of the type which are attached to water hoses (rather than air supply lines) for spraying substances such as garden chemicals. The description also applies to suction-feed guns, i.e. guns in which the liquid outlet from the reservoir is located at the top of the reservoir when the gun is in use and liquid is drawn from the reservoir through a supply tube by the action of the compressed air or other pressurized fluid flowing through the gun. In that case, when a liner is provided for the reservoir, the construction of the liner and/or the supply tube should be such that the liner can collapse without blocking the supply tube. For example, a short supply tube can be used provided all air is exhausted from the liner before the gun is used.

Alternatively, a flexible supply tube could be used, which will collapse with the liner. As a further alternative, a modified liner which does not have a rigid base could be used, so that the liner collapses in a different manner from the liner 13 of Fig. 2. Since the reservoir of a suction-feed gun is not inverted during use, as in a gravity-feed gun, it is possible to omit the air hole in the reservoir, provided the connection between the reservoir and the gun permits air to enter the space between the reservoir and the liner.

Returning now to the paint pot 11 of Fig. 2, the liner 13 will now be described in greater detail, together with a method by which it can be produced. The liner,

WO 98/32539

PCT/US98/00796

shown in isolation in Figs. 19 and 20, is preferably transparent and is thermo-formed from a single piece of plastics material, preferably polyethylene or polypropylene. The shape of the liner is dictated by the internal shape of the container 12. The comparatively rigid base 13A is circular and the liner 13, like the inside of the container 12, is generally cylindrical but tapers inwards slightly from the mouth towards the base 13A. The rim portion 14, like the base, is also comparatively rigid but the side walls 13B are flexible and, as already described, can be made to collapse. Nevertheless, the liner 13 is capable of standing, unsupported, on the base 13A with the side walls 13B extended and upright as shown in Fig. 19. When the liner 13 collapses, the comparatively rigid base 13A retains its form but moves towards the rim portion 14 of the liner as a consequence of the collapse of the side walls 13B, as illustrated in Fig. 20. The side walls 13B collapse in a similar fashion to a plastic bag without being ruptured (e.g. by splitting, tearing or cracking).

In one form, the liner has a height of about 110 mm, a diameter at its base 13A of about 78 mm and a diameter at its mouth (excluding the rim portion 14) of about 86 mm. The base has a thickness of about 400 μm , the rim portion 14 has a thickness of about 900 μm , and the side walls 13B have a thickness of about 150 μm . In another form, the liner has the same height and the same diameters at its base and mouth but the base has a thickness of about 300 μm , the rim portion has a thickness of about 200 μm , and the side walls 13B have a thickness in the range of from 50 to 250 μm .

A method of producing a liner as shown in Fig. 19 will now be described with reference to Fig. 21 (a)-(c).

A sheet 60 of low density polyethylene (LDPE), approximately 250 x 225 mm and 0.5 mm thick, was clamped at its periphery in the moulding frame 61 of a vacuum-forming machine. The LDPE material is commercially available from, for example, Plastech Extrusions Ltd. of Widnes, Cheshire, England and the vacuum-forming

WO 98/32539

PCT/US98/00796

machine used was the model "FLB 725" from C.R. Clarke and Company Limited of Ammanford, Carmarthenshire, Wales. It will be appreciated, however, that any suitable plastics material could be used and that the method could be carried out using any suitable thermo/vacuum-forming machine.

5

After the sheet 60 had been placed in position, the bank of heaters 62 of the vacuum-forming machine was moved into position above the sheet (as shown in Fig. 21(a)), and the sheet was heated to a soft, pliable, state suitable for vacuum-forming. The fact that the sheet had reached the appropriate temperature could be seen by the change in its appearance from milky to transparent.

10

The bank of heaters 62 was then removed and the mould platen 63 was moved upwards from below the sheet 60, bringing the mould 64 into contact with the sheet to deform the latter in an upwards direction. At this time, the vacuum pump of the machine was switched on to remove air from beneath the sheet 60. The upward movement of the mould platen 63 was continued until the platen reached the top of its stroke, where it seals against the frame 61 holding the sheet 60 (Fig. 21(b)). The mould 64 had a shape corresponding to the internal shape of the container 12 of the spray gun paint pot 11.

15

20

Operation of the vacuum pump was continued with the mould platen sealed against the frame 61 and the pressure difference created between the upper and lower sides of the sheet 60 caused the latter (which was already in contact with the top of the mould 64) to move down into contact with the sides of the mould (Fig. 21(c)). The mould platen 63 was then moved away from the cooled sheet 60 leaving a moulded portion 65 having the desired shape of the liner 13 and without any pleats, corrugations, seams, joints or gussets, or any groove at the internal junction of the side walls 13B with the base 13A. Following removal from the frame 61, the sheet 60 was trimmed around the mouth of the moulded portion 65 to form the rim 14 of the liner 13. The width of the rim 14 is determined by the location at which the sheet 60 is trimmed at this stage, and can be adjusted as required.

25

30

WO 98/32539

PCT/US98/00796

The above-described process was found to yield a moulded portion 65 (and hence a liner 13) in which that part of the plastics sheet 60 that had been in contact with the sides of the mould 64 during the forming process was substantially thinner than the part that had been in contact with the top of the mould. The process differs from a conventional vacuum-forming process which would aim to eliminate, as far as possible, any differences in thickness in the moulded portion 65 and, to that end, would include the additional step of applying air pressure to the underneath of the heated sheet 60, after step (a) of Fig. 21, to cause the sheet to adopt a dome shape before the mould platen 63 seals against the frame 61: the thickness of the sheet would then be comparatively even when it moves into contact with the mould 64 in step (c) of Fig. 21. Generally in the process illustrated in Fig. 21, for a given size of sheet 60, the size of the mould 64 has been found to affect the thickness of the sides of the resulting liner 13 more than the base. In other words, if the size of the mould 64 is increased, the thickness of the base of the resulting liner 13 will be about the same but the sides of the liner will be much thinner. On the other hand, if the size of the mould is decreased, it may be found that a point is reached at which longitudinal creases appear in the sides of the liner 13.

If a further reduction is required in the thickness of the sheet 60 where it contacts the sides of the mould 64 in step (c) of Fig. 21, the sheet 60 can be located between two thin metal plates 66 (Fig. 22) when it is clamped in the frame 61 of the forming machine, each metal plate 66 having a hole 67 in the location of the mould 64 and larger in size than the largest cross-section of the mould. The plates 66 are also clamped in the frame 61 and the process of Fig. 21 is then repeated. The effect of the plates 66 is that only the central portion of the sheet 60 is exposed directly to the heaters 62 and is drawn over the mould 64 when the latter has been moved upwards (in this case, through the holes 67 in the plates 66). In that way, less of the sheet 60 is used in the formation of the moulded portion 65 and the resulting liner 13 will have a slightly thinner base 13A and rim 14 and substantially thinner side

WO 98/32539

PCT/US98/00796

walls 13B. It is also possible to obtain a comparable result by using only the upper plate 66 shown in Fig. 22.

As a modification of the process illustrated in Fig. 22, the plastics sheet 60 can be in the form of a circular disc of material which is clamped at its periphery between the two plates 66. Depending on the size of the disc, the clamped periphery may then form the rim 14 of the liner 13 and there may be no excess material to be trimmed away.

It has been found that a liner 13 produced by a process as described with reference to Figs. 21 and 22 will collapse as described with reference to Fig. 20 when used in the spray gun reservoir 11 of Fig. 2. The liner 13 can also be collapsed by hand by pushing the base 13A of the liner towards the rim 14. It has been found that the liner is typically capable of standing unsupported on its base 13A and this feature, although not essential to the use of the liner in the spray gun reservoir 11, may be of use for storage purposes. The liner has no pleats, corrugations, seams, joints or gussets, and no groove at the internal junction of the side walls 13B with the base 13A: consequently, there are no internal locations in which material within the liner can become trapped. The base 13A of the liner will, of course, occupy some space at the base of the container 12 of the spray gun reservoir 11 and the markings on the wall of the container 12 need to be positioned to take account of that fact.

Although the liner 13 of Fig. 19 has been described for use specifically in the paint pot 11 of Fig. 2, the same or a similar article can be used in other ways (subject, if necessary to appropriate dimensional changes). For example, an article of the type illustrated in Fig. 19 can also be used as a liner in many forms of receptacle other than a spray gun reservoir. It is often desirable to provide a receptacle with a disposable liner, for example to keep the receptacle clean, to facilitate cleaning, or to protect the receptacle or its contents. A liner of the type illustrated in Fig. 19 can be used for any of those purposes and is especially useful in receptacles in which

WO 98/32539

PCT/US98/00796

substances are mixed together because there are no locations on the inside of the liner in which material can become trapped and remain unmixed.

An article of the type illustrated in Fig. 19 can, for example, be used as a liner in a receptacle intended for paint mixing in a vehicle body shop, in which case it will provide an attractive alternative to the disposable drinking cups which are often employed for that purpose. Prior to painting the repaired portion of a vehicle in a body shop, the repairer must mix-up a batch of paint of the required colour, matching the colour of the surrounding portion of the vehicle. The various components for a batch of paint should be measured accurately, either by volume or by weight, into a suitable receptacle in which they are mixed together thoroughly before being used. If the mixing is less than thorough, or if the receptacle is not absolutely clean, the colour/quality of the batch of paint (and, consequently, the quality of the repair) may be affected.

To enable paint mixing to be carried out conveniently, but effectively, a liner of the type illustrated in Fig. 19 can be used with a measuring vessel 70 as shown in Fig. 23. The measuring vessel 70 is in the form of a pitcher having a spout 71 in a shaped rim 72 and a handle 73. The pitcher is provided with markings 74 on the side walls, enabling the volume of the contents of the pitcher to be determined. Using the method already described with reference to Fig. 21, liners of the type shown in Fig. 19 can be produced to fit accurately inside the pitcher 70 and, by utilizing such a liner, the various components for a batch of paint can be assembled and mixed together in the pitcher 70 without actually coming into contact with the latter.

A liner 75 suitable for use in the pitcher 70 is illustrated in Fig. 24. The liner 75 has a shape corresponding to the interior of the pitcher 70 and is generally similar to the liner 13 illustrated in Fig. 19 except that the thicker, outwardly-extending, rim portion 14 of the latter is omitted and the side walls 76 of the liner 75 include a shaped rim 77 corresponding to the rim 72 and spout 71 of the pitcher. Because the

WO 98/32539

PCT/US98/00796

liner 75 fits the inside of the pitcher 70 exactly, the possibility that it will be punctured by the mixing implement when paint is being mixed in the pitcher is minimized. In addition, because there are no locations in the interior of the liner in which material can become trapped, there is no barrier to the effective mixing of all the material that is measured into the pitcher. When the paint has been mixed and transferred from the pitcher 70 (for example, to the paint pot of a spray gun), the liner 75 is removed, preferably collapsed as shown in Fig. 20, and thrown away, leaving the pitcher 70 clean and ready for further use.

Because the base 78 of the liner 75 will occupy some space at the bottom of the pitcher 70, the markings 74 on the side walls of the pitcher may need to be positioned to take account of that fact. It may also be desirable, depending on the shape of the pitcher 70, to provide an extension at the top of the liner 75 which can be folded back over the rim 72 of the pitcher. Alternatively, or in addition, it may be desirable to seal the liner 75 to the pitcher 70 during use, for example by providing some form of shaping on the liner and the pitcher so that they can be snap-fitted together at the rims 77, 72.

Although it is desirable that the liner 75 of the pitcher 70 should be collapsible so that it occupies less space after use, that is not absolutely essential. Moreover, since the shape of the liner 75 is determined by the shape of the interior of the receptacle 70 in which it is to be used, there may be cases in which the liner is not capable of standing, unsupported, outside the receptacle.

As a further alternative, an article of the type shown in Fig. 19 can be used simply as a container in which case it has the advantage that, although the walls 13B are comparable in flexibility to a plastic bag, the container will stand upright, without support, while it is being filled and also afterwards. The container can be of any appropriate size and can be used to contain many different types of items, including for example powders and liquids, or simply as an alternative to the plastic/paper bags provided to customers by retailers. In each case, the container has the

WO 98/32539

PCT/US98/00796

advantage that there are no internal locations in which material within the container can become trapped. Depending on the contents of the container, it may be desirable to be able to close the container mouth, in which case some appropriate form of closure can be provided. The closure may, for example take the form of an
5 internal rib on the inside of the container around one half of the mouth, and a mating groove also on the inside of the container around the other half of the mouth into which the rib can be pressed to close the container. The flexibility of the container walls 13B additionally allows the walls to be pressed down around the contents, thereby reducing the air space within the container if required.

10

After use, when it is required to dispose of the container, the side walls 13B can be collapsed by hand by pushing the rim 14 towards the base so that the container (now in the form illustrated in Fig. 20) requires less space for disposal. As already mentioned, the side walls 13B collapse in a similar fashion to a plastic bag without
15 being ruptured (e.g. by splitting, tearing or cracking).

20

It will be appreciated that there are many other possible uses for articles of the type shown in Fig. 19. A liner of that type could, for example, be used simply as a liner for a refuse bin where it would offer the advantage of being a better fit inside the
20 bin than a conventional bag-shaped liner, and of being easier to handle when removed from the bin because it will stand upright on the base 13A. Similar liners could also be used in buckets or other containers for materials that harden comparatively quickly (for example glue, wax or plaster): in some cases, material such as plaster is actually sold together with a mixing bucket, in which case a supply
25 of liners could be included in the package. In some circumstances, it might be appropriate to have a plurality of liners, stacked one inside another, in position inside a receptacle so that when one liner is removed the next is already in position. Moreover, since the receptacle is intended to contain a liner, it is not essential for the walls of the receptacle to be solid: the receptacle could, for example, have the
30 form of a framework for containing the liner.

WO 98/32539

PCT/US98/00796

Generally, in an article of the type shown in Fig. 19, the base 13A is typically at least 25 μm thick, more typically at least 100 μm thick. The side walls 13B are thin in comparison to the base 13A, to the extent that they can be collapsed as described to facilitate disposal of the liner/container: typically, the thickness of the side walls 13B is less than half the thickness of the base 13A and may be less than one fifth the thickness of the base. Depending on the materials used, and the intended use of the liner/container, the side walls 13A will usually be less than 250 μm thick.

For certain uses of an article of the type shown in Fig. 19, the rim portion 14 may not be essential and can be omitted (as in the liner of Fig. 24). If no rim 14 is required the sheet 60 of Fig. 21(c) would, of course, be trimmed immediately adjacent the mouth of the moulded portion 65. It has been found that the self-supporting nature of the liner/container can be retained even if the rim portion 14 is omitted.

It should also be noted that the base 13A of a container/liner of the type shown in Fig. 19 need not be circular but could have another shape, for example rectangular or triangular. In the case of a liner for a receptacle, that shape may be dictated by the shape of the receptacle particularly if the liner is required to fit the interior of the latter. In some cases, the base need not be rigid.

It will further be appreciated that the process illustrated in Figs. 21 and 22 is not restricted to the production of liners for use in the paint pots of spray guns and can be adapted to produce liners/containers for other purposes. It will be appreciated that the process requires the mould 64 to have a slightly tapered shape with the largest cross-section being at the lower end (as seen in Figs. 21 and 22) to allow the sheet 60 to be removed when the forming operation is complete. When the process is used to produce of a liner which is required to fit inside a container, that, in turn, requires that the container should be similarly tapered internally. The liner/container may be formed from any suitable thermoplastic material capable of forming a thin film which is impervious to the materials it is intended to contain. In

WO 98/32539

PCT/US98/00796

some cases, it may be desirable to use a material which is in the form of a laminate. For certain applications, such as food packaging, plastics with a low gas-permeability may be preferred. For most applications, however, polyolefins such as polyethylene or polypropylene are preferred since these are relatively cheap, are readily thermo-formable, and are inert to most aqueous and organic fluids.

5

60557-6121D

CLAIMS:

1. A gravity-fed spray gun comprising a fluid reservoir having a removable lid located in an opening in the reservoir; and a spray nozzle for dispensing fluid drawn
5 from within the reservoir through an outlet in the lid; wherein the reservoir is removable from the gun, is capable of standing on its own to enable fluid to be loaded into the reservoir through the opening, and is collapsible for disposal.
- 10 2. A spray gun as claimed in claim 1, in which a closable air vent is formed in the end of the reservoir remote from the lid.
3. A spray gun as claimed in claim 1 or claim 2, in which the reservoir is formed from a plastic material.
- 15 4. A spray gun as claimed in any one of claims 1 to 3, further comprising a removable filter positioned to filter fluid passing from within the reservoir to the spray nozzle.
5. A spray gun as claimed in claim 4, in which the
20 filter is located within the reservoir and is removable from the reservoir together with the lid.
6. A spray gun comprising a fluid reservoir; and a spray nozzle for dispensing fluid from within the reservoir; the reservoir comprising a self-supporting container which
25 is removable from the gun and is collapsible for disposal.
7. A spray gun as claimed in claim 6, in which the container has a removable lid in which the outlet for fluid from within the reservoir to the spray nozzle is formed.

60557-6121D

8. A spray gun as claimed in claim 7, in which the lid is also removable from the gun.

9. A spray gun as claimed in claim 7 or claim 8, further comprising a removable filter positioned in the
5 reservoir to filter fluid passing from within the reservoir to the spray nozzle, the filter being removable from the container together with the lid.

10. A spray gun as claimed in any one of claims 7 to 9, including a closable air vent in the end of the
10 container remote from the lid.

11. A spray gun as claimed in any one of claims 6 to 10, in which the container is formed from a plastic material.

12. For use in a spray gun, a container for attachment
15 to the spray gun to form, without the presence of any other receptacle, a fluid reservoir for the gun; the container being a sealed container and having fluid therein.

13. A container as claimed in claim 12, in which the container is opened on attachment to the spray gun, to form
20 a fluid reservoir for the gun.

14. A container as claimed in claim 13, including an air vent which, when opened, permits fluid to flow from the container.

15. A container as claimed in any one of claims 12 to 14, the container comprising an outer casing within which
25 is a liner containing the said fluid.

16. A fluid reservoir for attachment to a spray gun, the reservoir having a removable lid which is located in an opening in the reservoir and in which is formed a fluid

60557-6121D

outlet for the reservoir, the fluid outlet being shaped for attachment to the spray gun; and a closable air vent in the end of the reservoir remote from the lid.

17. A liner for use in the reservoir of a spray gun,
5 the liner being thermo/vacuum-formed from a thermoplastic material and being a close fit within the reservoir; the liner having a comparatively rigid base, side walls which are thin in comparison to the base and are collapsible, and a flat outwardly-extending rim portion which is shaped to
10 sit on the edge of an opening in the spray gun reservoir.

18. A liner as claimed in claim 17, in which the rim portion is also comparatively rigid.

19. A liner as claimed in claim 17 or claim 18, in which the rim portion is substantially thicker than the side
15 walls of the liner.

20. A liner as claimed in any one of claims 17 to 19, the liner being capable of standing, unsupported, on the base with the side walls extended and upright.

SMART & BIGGAR
OTTAWA, CANADA

PATENT AGENTS

WO 98/32539

PCT/US98/00796

1/12

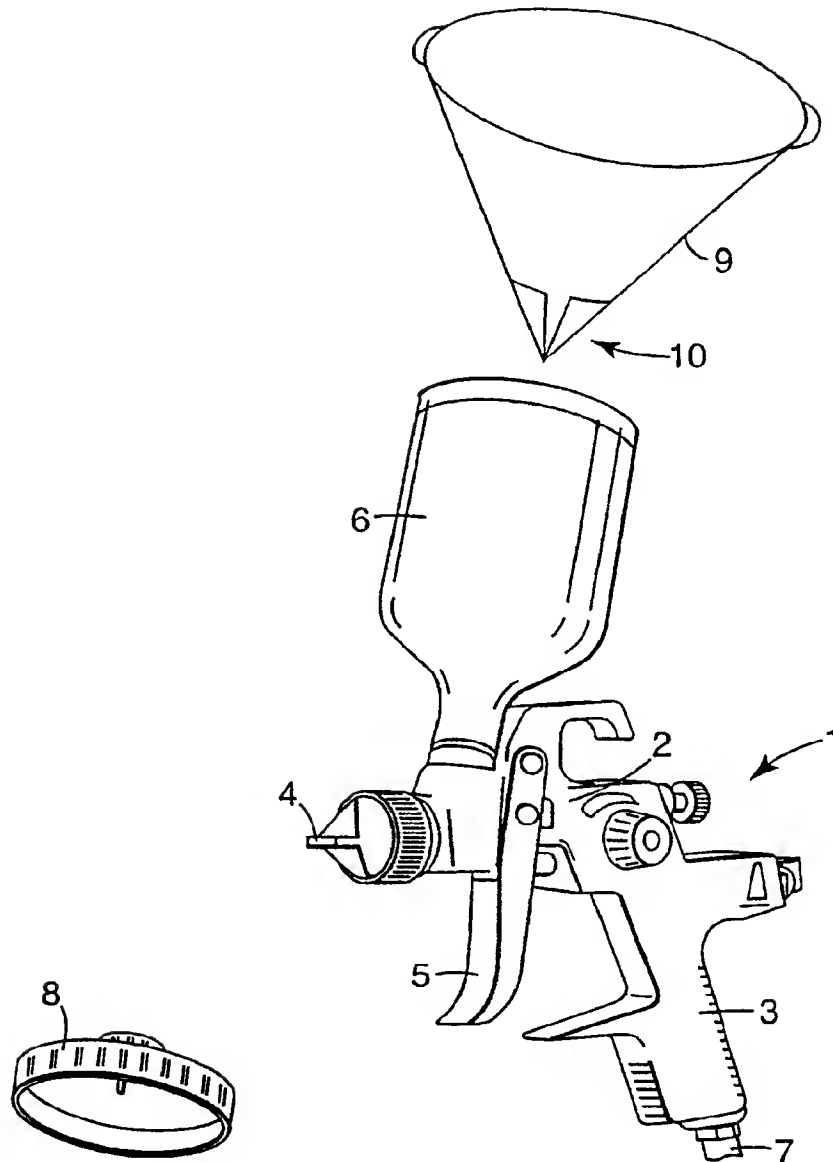
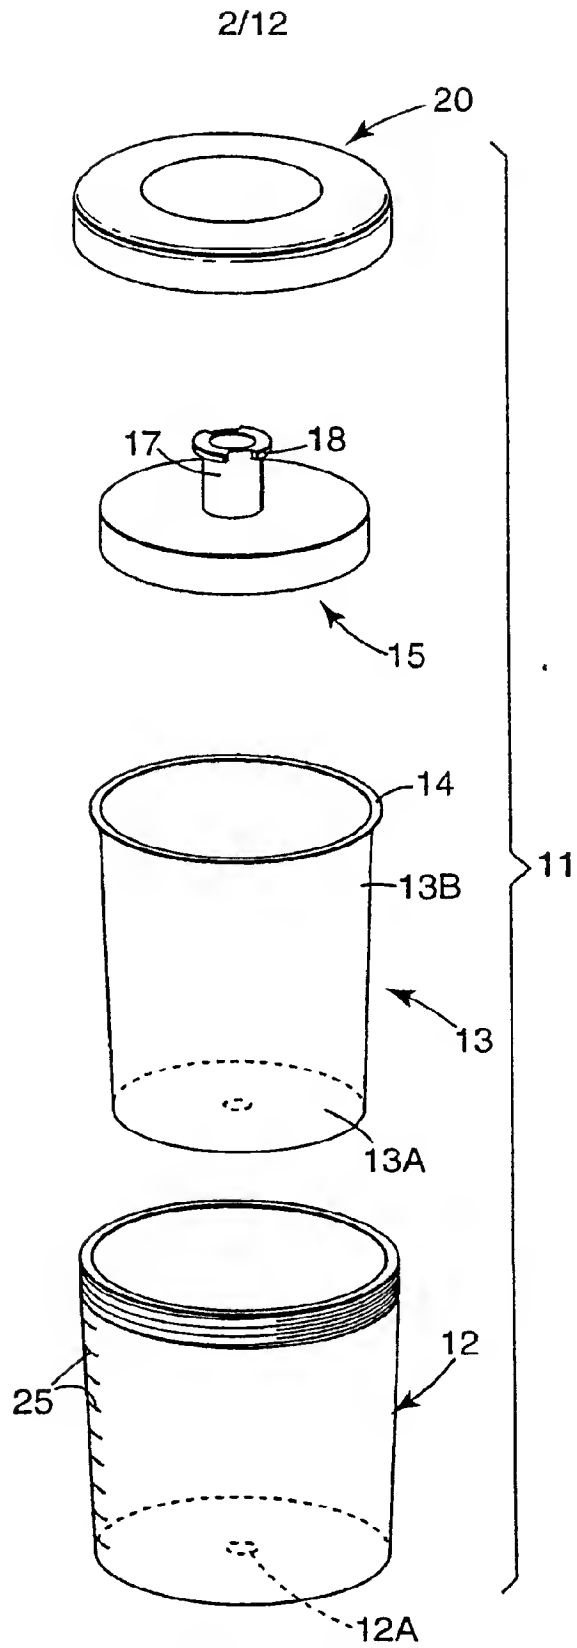


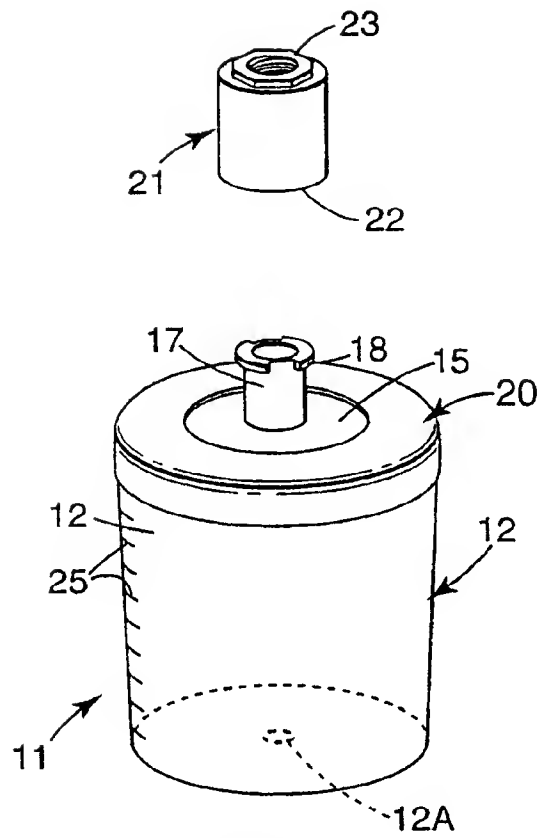
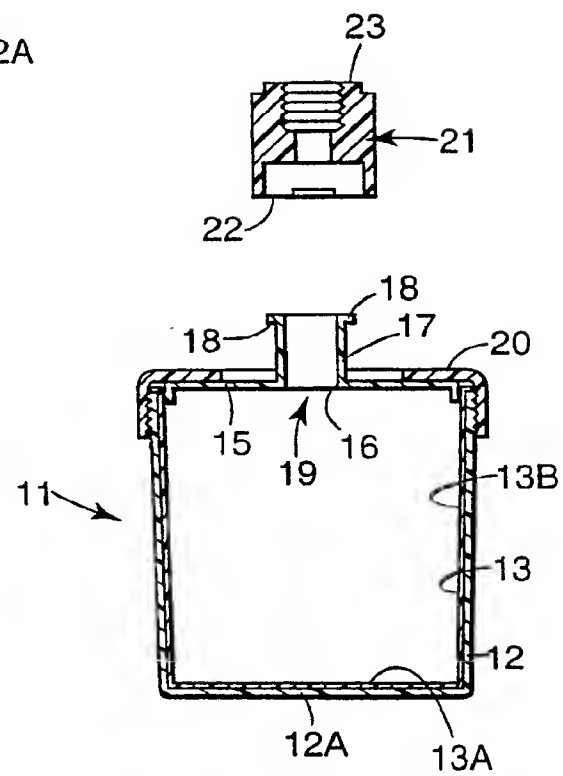
Fig. 1
PRIOR ART

**Fig. 2**

WO 98/32539

PCT/US98/00796

3/12

**Fig. 3****Fig. 4**

WO 98/32539

PCT/US98/00796

4/12

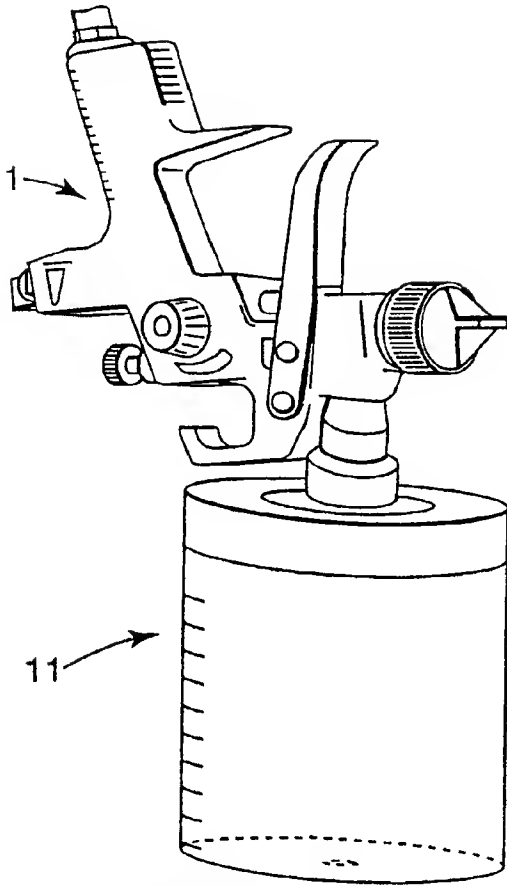


Fig. 5

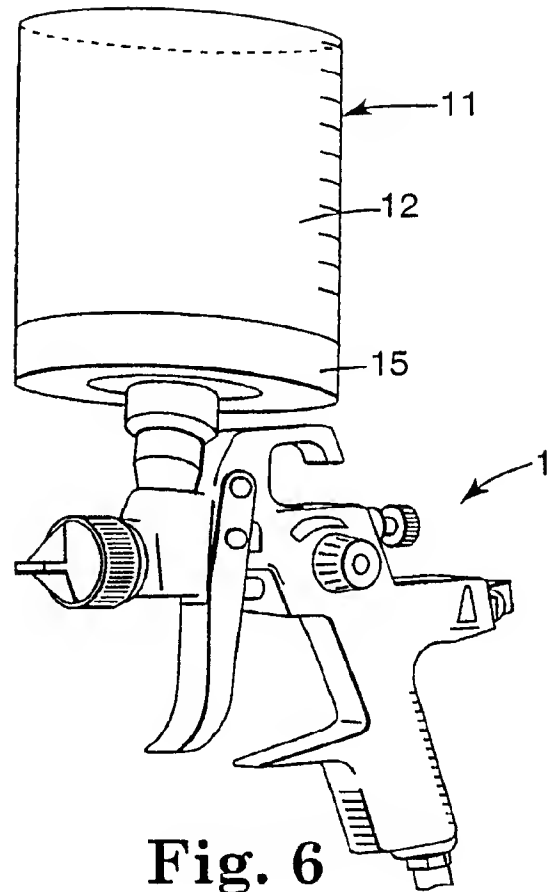


Fig. 6

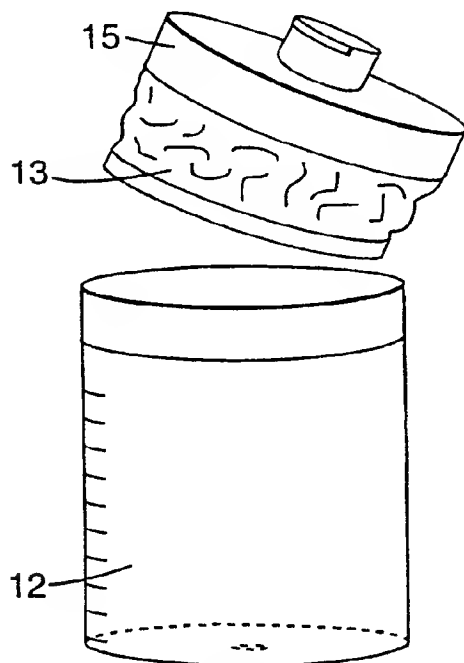


Fig. 7

5/12

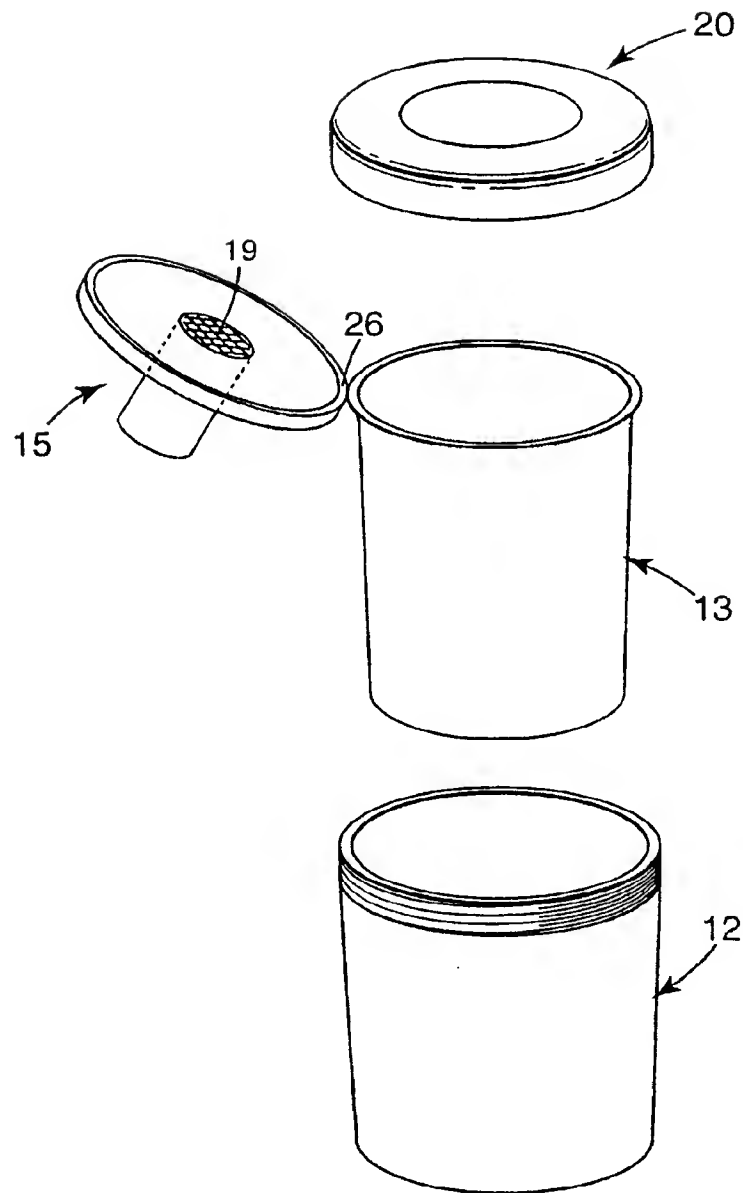
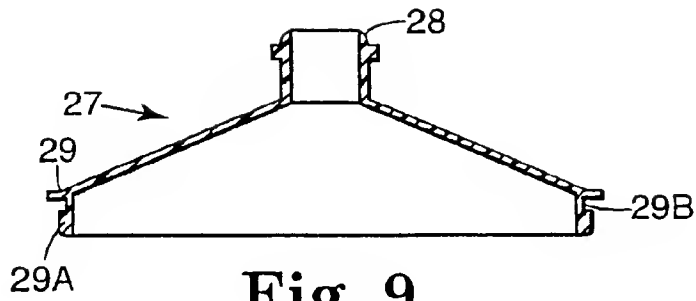
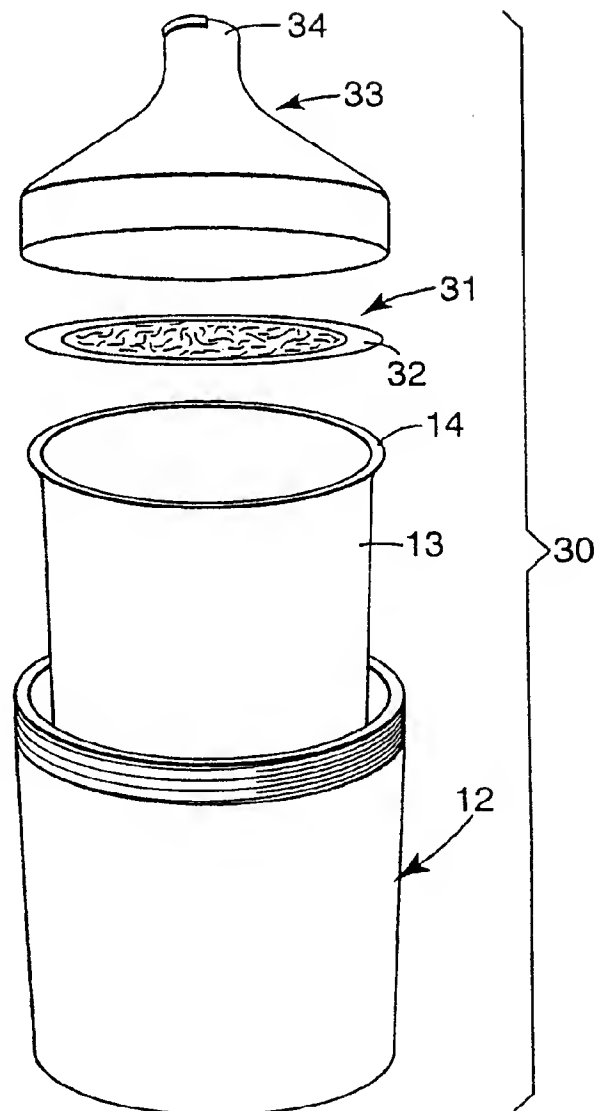


Fig. 8

WO 98/32539

PCT/US98/00796

6/12

**Fig. 9****Fig. 10**

WO 98/32539

PCT/US98/00796

7/12

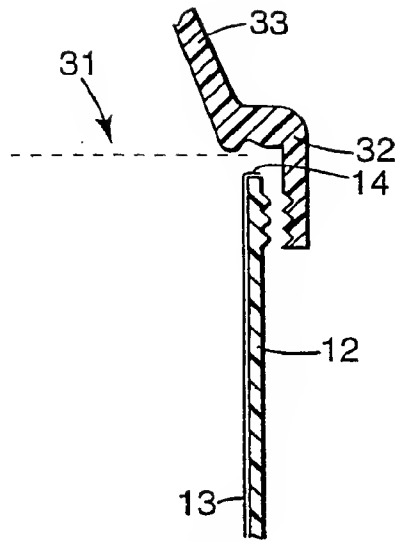


Fig. 11

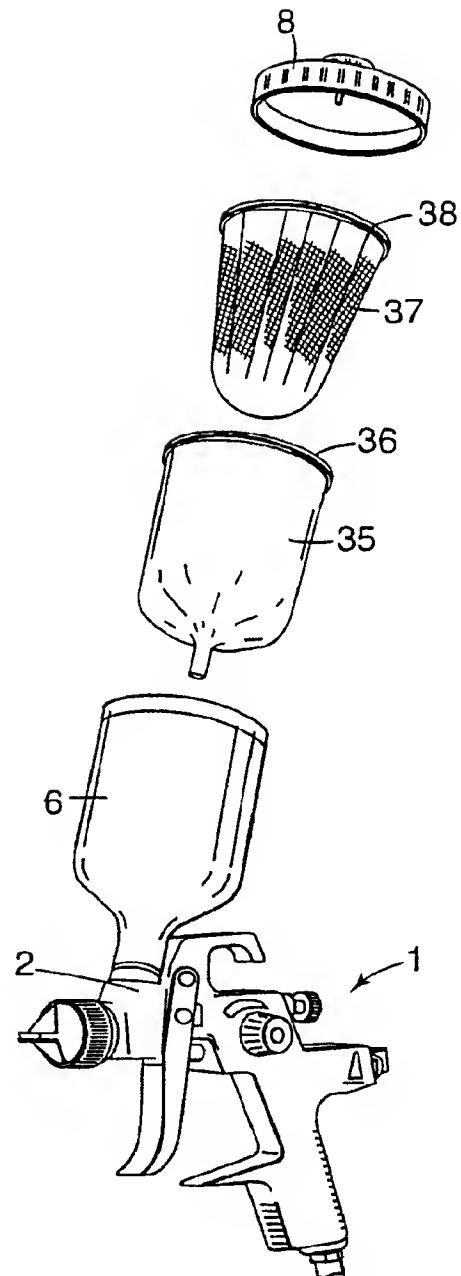


Fig. 12

WO 98/32539

PCT/US98/00796

8/12

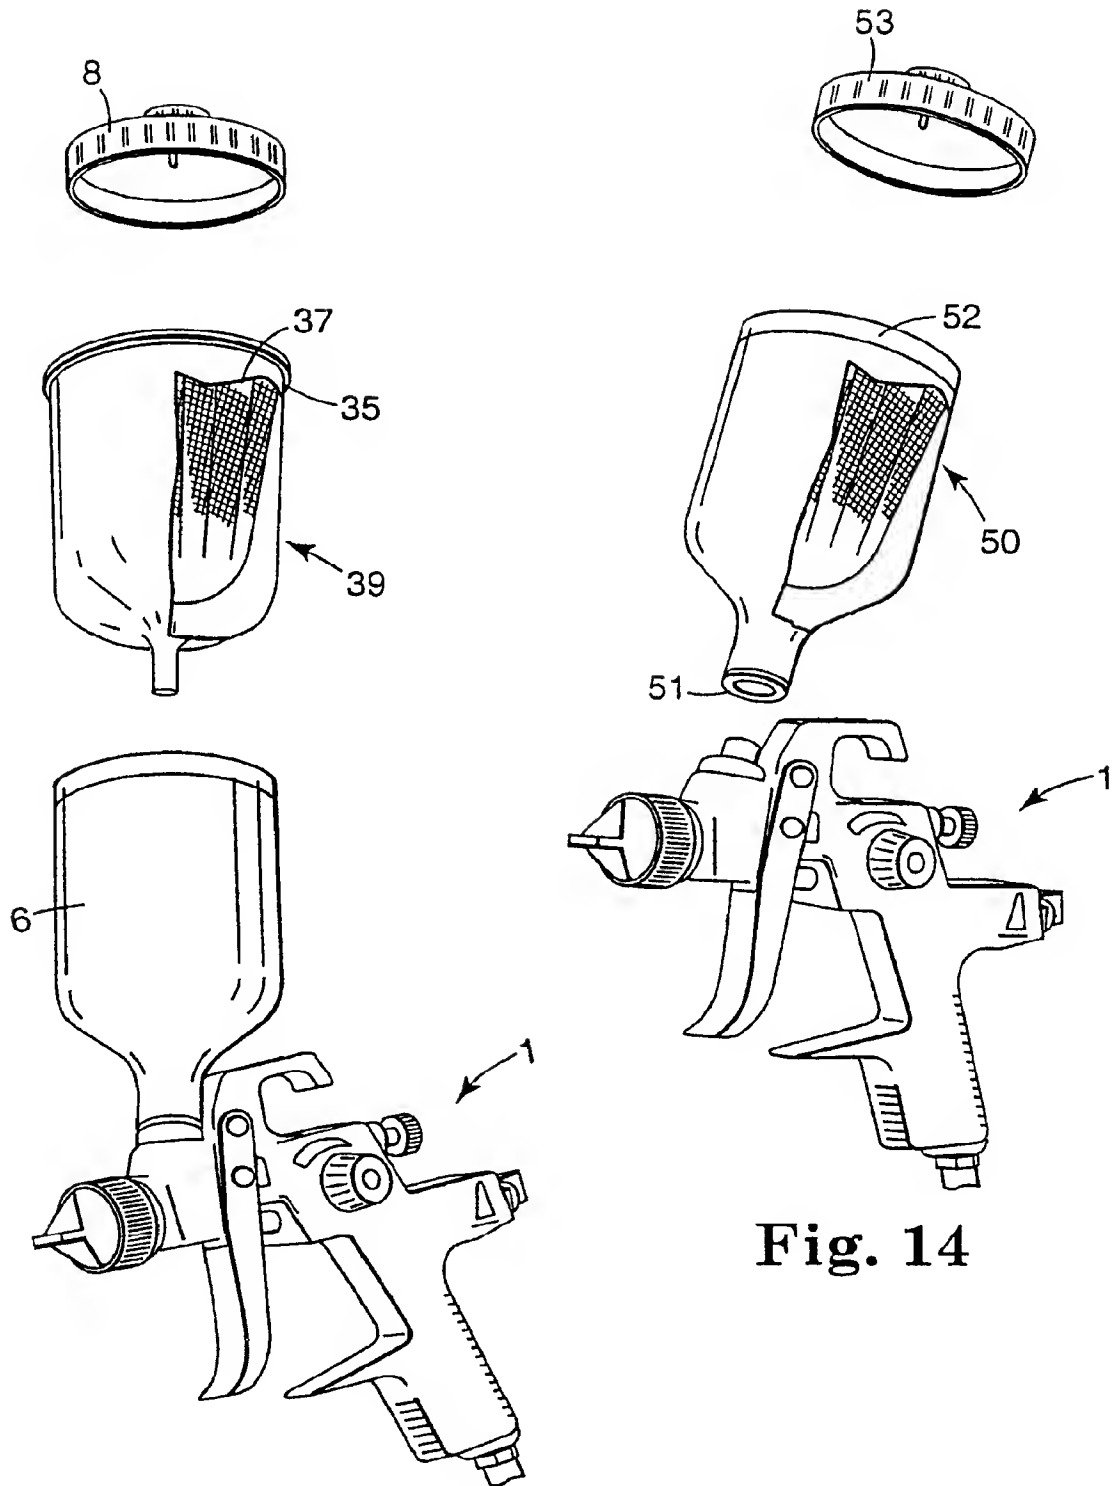


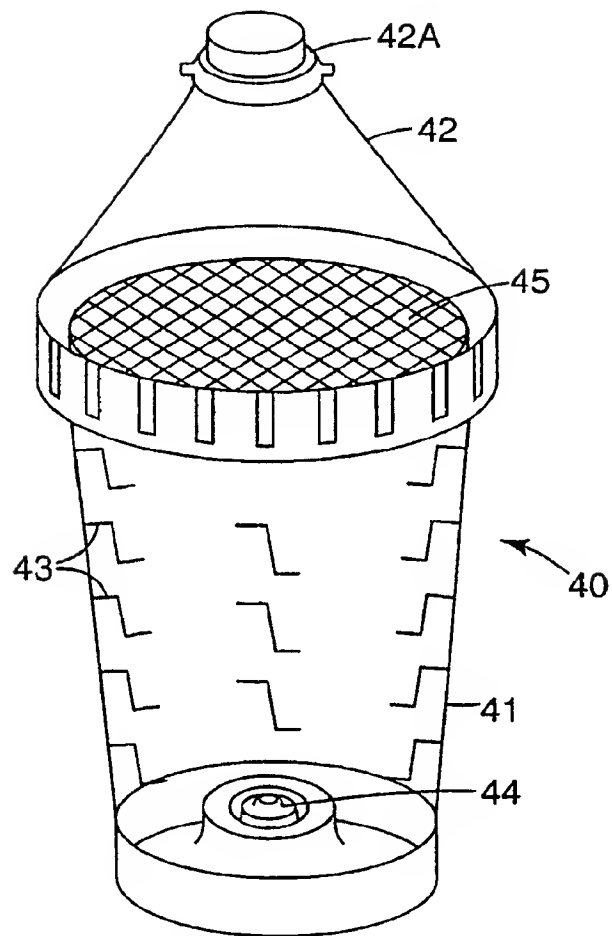


Fig. 14

Fig. 13

WO 98/32539

PCT/US98/00796

9/12

**Fig. 15****Fig. 16****Fig. 17**

10/12

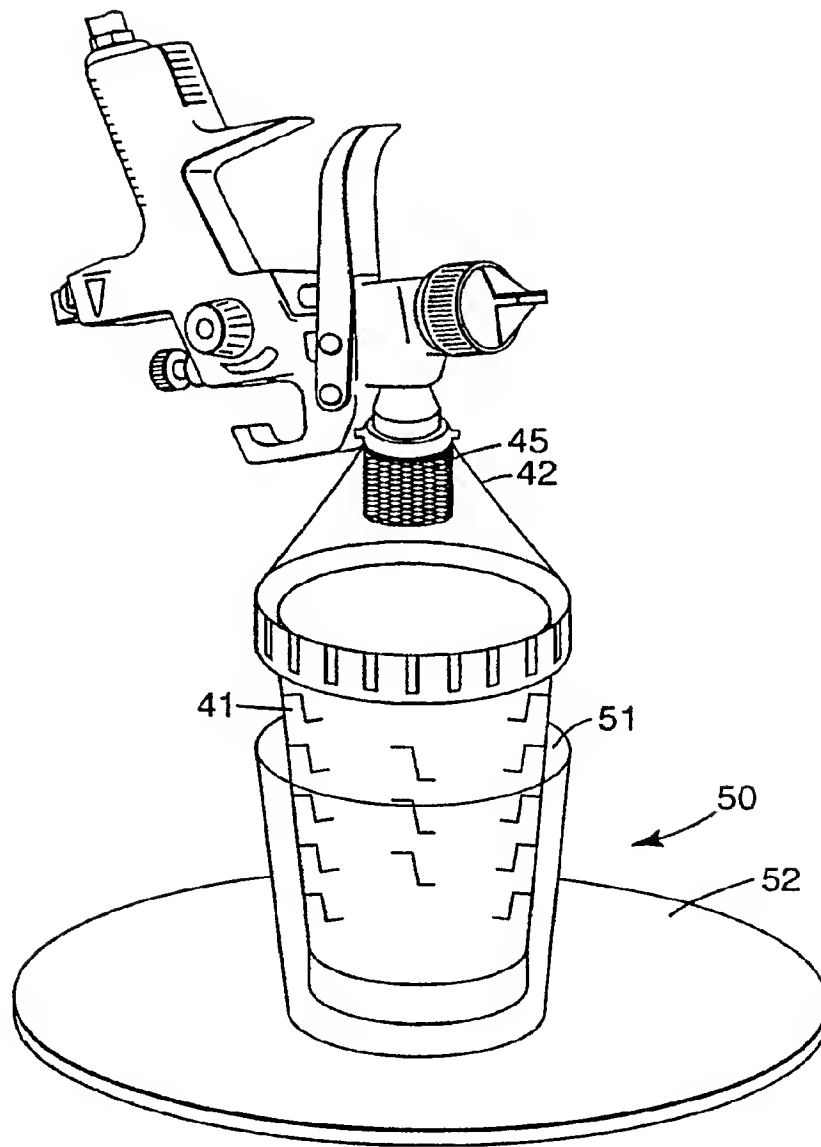
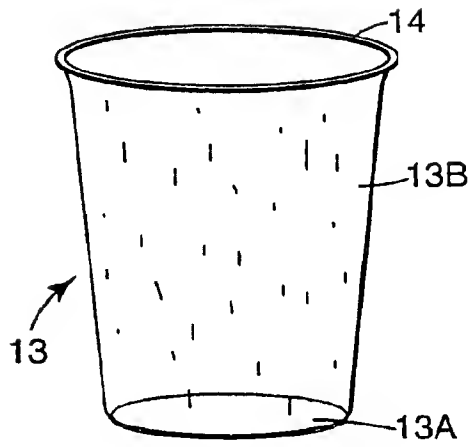
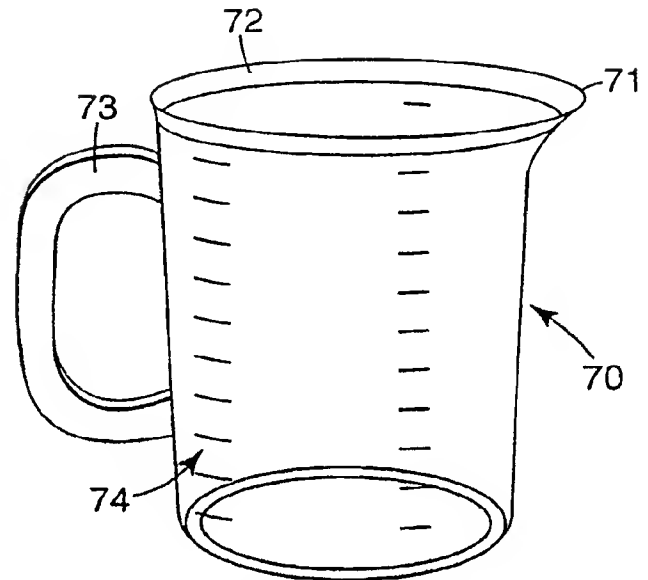
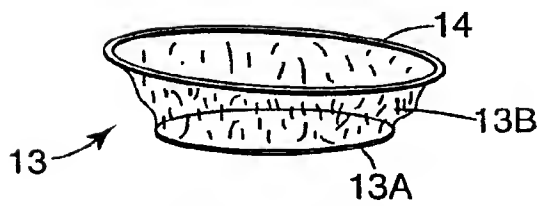
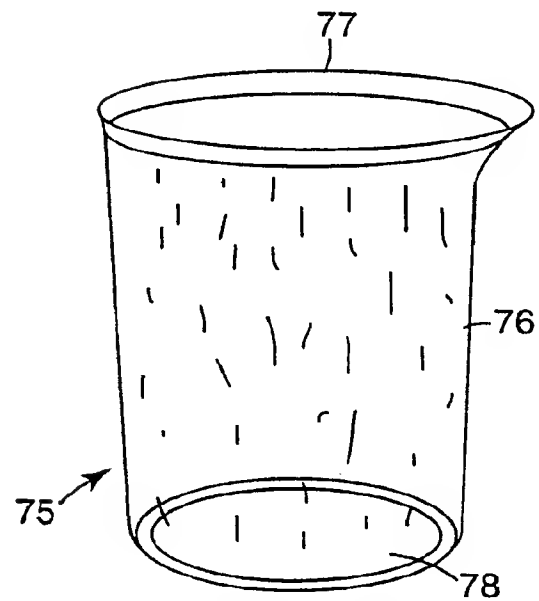


Fig. 18

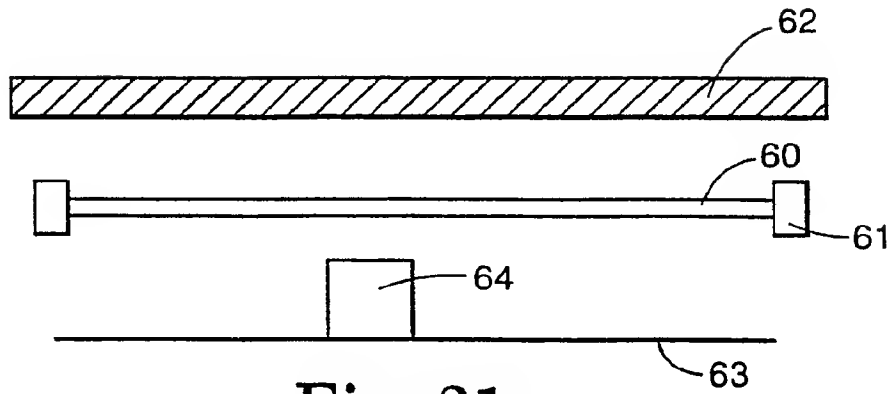
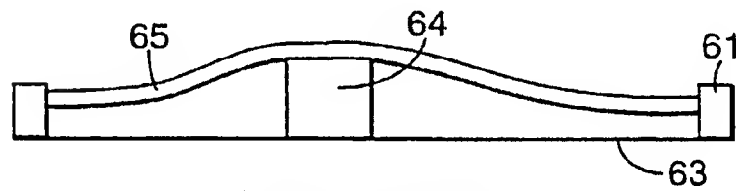
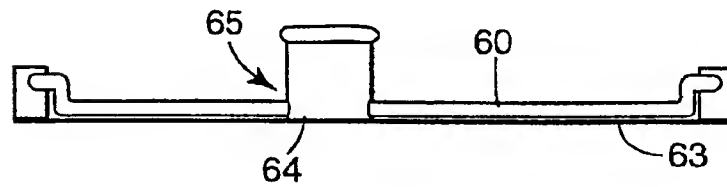
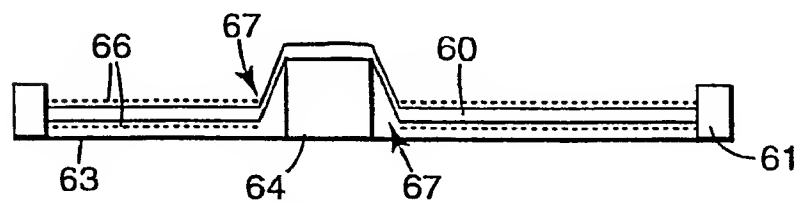
WO 98/32539

PCT/US98/00796

11/12

**Fig. 19****Fig. 23****Fig. 20****Fig. 24**

12/12

**Fig. 21a****Fig. 21b****Fig. 21c****Fig. 22**

